

In-Line Filter DWFF110 (8-03-110-100k, 8-03-110-010k)




DW fuel filters are compatible with a wide range of fuels including pump gas, race gas, MTBE, ethanol, methanol, and diesel. DW recommends a maximum service interval of 12 months or 12,000 miles. Shorter service intervals are recommended with harsher conditions and corrosive fuels.

- Stainless Steel 10 or 100 Micron
- -8AN ORB Inlet/Outlet
- 110mm Length
- Universal Fitment


Specifications

Weight	10.8 oz (305 grams)
External Materials	Anodized T6061 Aluminum
Inlet Fitting	-8 AN ORB
Outlet Fitting	-8 AN ORB
Sealing	Viton O-rings
Mechanical Filtration	304 Stainless Steel Mesh
Magnetic Filtration	35mm Neodymium Ring
Flow Rating (10 μ)	500 LPH
Flow Rating (100 μ)	1,000 LPH
Avg Surface Area	40 sq in

Pressure Drop

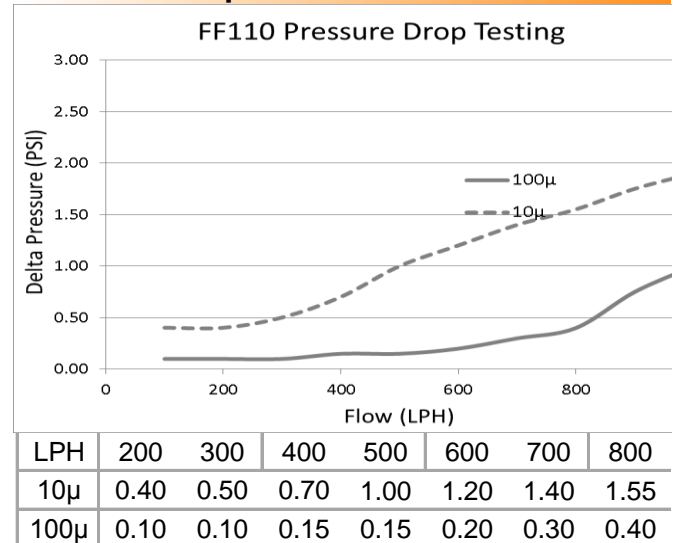

Dimensions

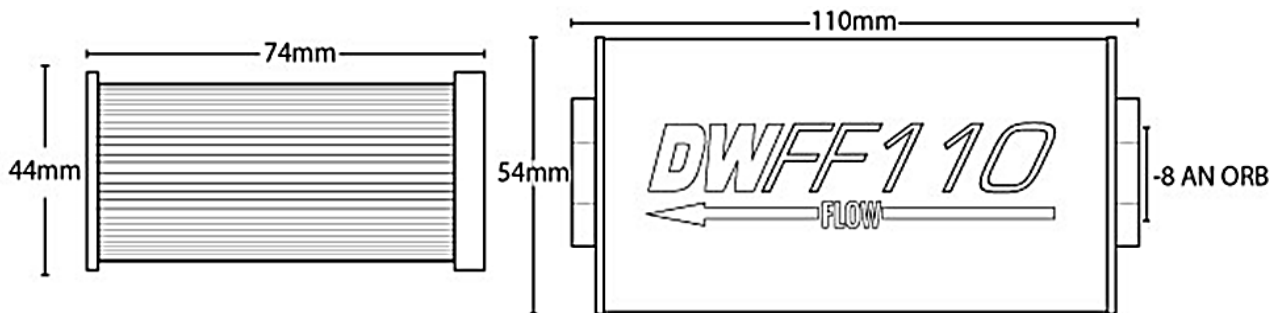

THIS PRODUCT MAY BE USED SOLELY ON VEHICLES USED IN SANCTIONED COMPETITION WHICH MAY NEVER BE USED ON PUBLIC ROAD OR HIGHWAY, UNLESS PERMITTED BY SPECIFIC REGULATORY EXEMPTION




f fuels

im
rter



900
1.75
0.75



PON A