

9-401-1041 98-11 Nissan Patrol DW400 Fuel Pump Installation Guide



Parts List:

- DW401
- Fuel Hose
- Hose Clamps (x2)
- Fuel Sock
- 10" Electrical Connector


98-11 Nissan Patrol DW400 Fuel Pump Installation Guide

98-11 Nissan Patrol DW400 Fuel Pump Install

IMPORTANT – For model years 07+, check VIN to ensure proper fitment (JN1TFSY61)

PLEASE READ – this guide is intended to aid in the installation of our products. It is recommended that factory manuals or instructions are followed to remove the fuel pump assembly from the vehicle. Some instructions in this guide are generic. The factory manual should supersede any contradiction. The DW400 pump has a larger body than most in-tank pumps it will replace. Some cutting of the assembly should be expected for proper fitment


Below is a picture of suggested tools that will make the installation process easier.

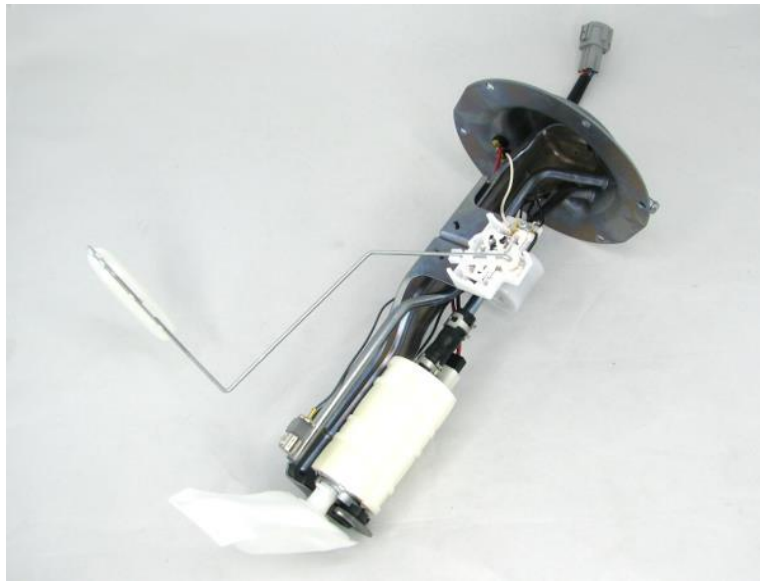

1 – remove the fuel pump model from the assembly and cut the inline pipe approximately 1"-1.5" shorter



2 – install the DW400 into the assembly using the supplied hose and clamps. Wire in the supplied electrical connector pigtail (blue is positive, the extra negative lead can be clipped or mounted to the assembly as an additional ground)

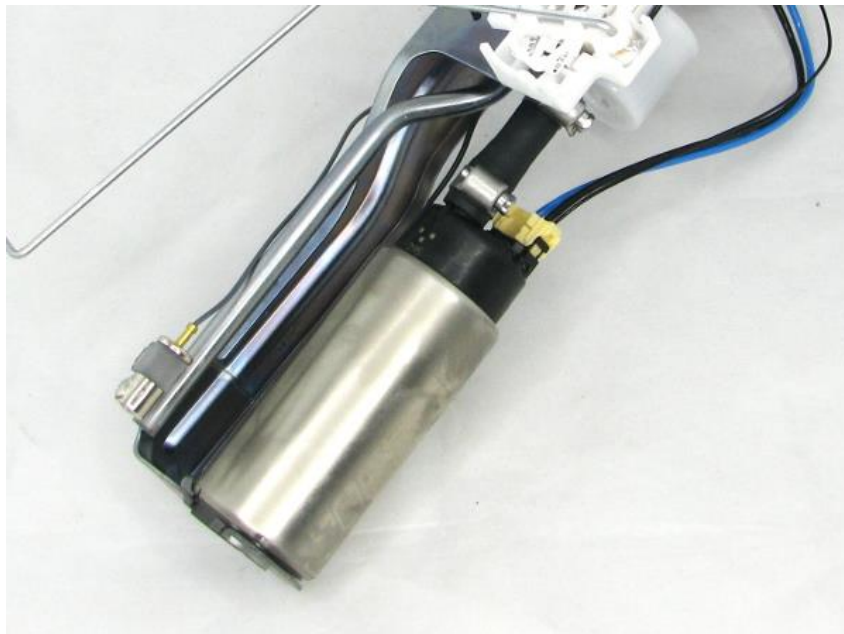

3 – install the fuel sock



4 – reinstall the assembly into the fuel tank and attach a length of hose to the outlet of the pump assembly allowing it to drain into a fuel safe container and prime the fuel pump assembly

5 – cycle the key to the on position as many times as required to prime the pump assembly and evacuate the air introduced during the pump installation process

6 – attach supply line to the outlet of the pump assembly